

KM Strain Transducers

Civil engineering design




The KM series strain transducers are designed to measure strain in materials such as concrete, synthetic resin which undergo a transition from a compliant state to a hardened state. Their extremely low modulus (40N/mm² approx.) and waterproof construction are ideally suited for internal strain measurement during the very early stages of curing. They are totally impervious to moisture absorption, producing excellent stability for long-term strain measurement. Relative temperature measurement is also possible with the KM-B. The built-in thermocouple sensor of the KM-BT enable actual temperature measurement in addition to strain measurement. Adding to the above embedment use, surface strain measurement onto concrete, H-beam steel is also available with various optional fittings.

The KM series is compliant to CE marking except for KM-30.



Protection ratings: IP67 equivalent for KM-30
IP68 equivalent for KM-100B ~ KM-100BT

DIMENSION

TYPE	Dimension					
	A	φ B	φ C	D	E	F
KM-30	34	12	10	31	3	M3 DP4
KM-100B	104	20	17	100	4	M3 DP6
KM-100HB	104	20	17	100	4	M3 DP6
KM-100BT	104	20	17	100	4	M3 DP6

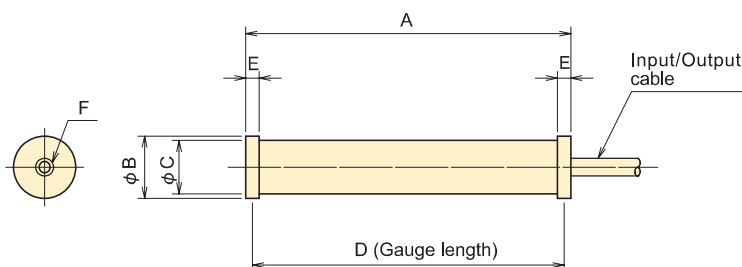


CONNECTION TO DATA LOGGER

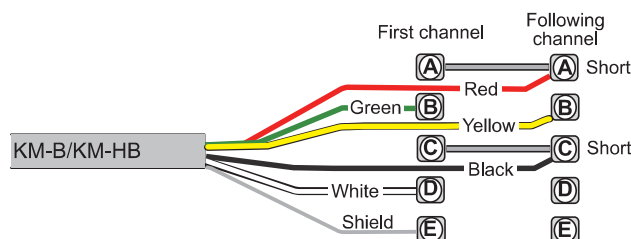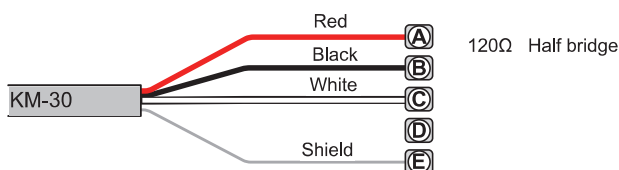

Consecutive 2 channels should be required for simultaneous measurement of strain and temperature.

Stranded cables of Green, White and shield are connected to the first channel. Remaining cables of Red, Yellow and Black should be connected directly to the following channel for temperature measurement, making short-circuit between A-A and C-C with copper wire for strain measurement.

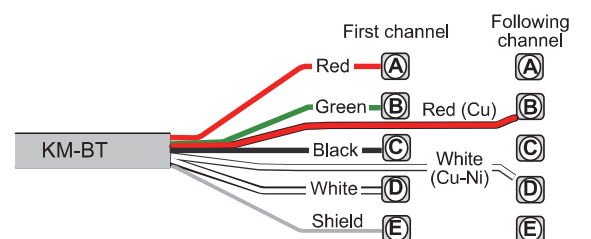

Consecutive 2 channels should be required for simultaneous measurement of strain and temperature.

Stranded cables of Red, Green, Black, White and shield to the first channel for strain measurement. Thermocouple of single core Red and White should be connected directly to the following channel for temperature measurement.

SPECIFICATIONS

TYPE	KM-30	KM-100B	KM-100HB	KM-100BT
Capacity	±5000x10 ⁻⁶ strain			
Gauge length	31mm	100mm		
Rated output (Approximately)	2.5mV/V 5000x10 ⁻⁶ strain	2.5mV/V 5000x10 ⁻⁶ strain		
Non-linearity	1%RO			
Apparent elastic modulus	40N/mm ²			
Strain measurement	120Ω Half bridge	350Ω Full bridge		
Temperature measurement	-	**Strain gauge (350Ω Quarter bridge 3-wire method :50x 10 ⁻⁶ strain/°C)		*2 Thermocouple T
Allowable temperature range	-20 ~ +60°C	-20 ~ +80°C	-20 ~ +180°C	-20 ~ +80°C
Input/Output resistance	120Ω (Half bridge)	350Ω Full bridge		
Weight	12 g	75 g	80 g	75 g

Input/Output cable :

KM-30	φ 2.4mm	0.04mm ²	3-core shielded vinyl cable	2m
KM-100B	φ 9mm	0.3mm ²	5-core shielded chloroprene cable	2m
KM-100HB	φ 6mm	0.3mm ²	5-core shielded fluoroplastic cable	2m
KM-100BT	φ 9mm	0.3mm ²	4-core shielded T-thermocouple compound cable	2m

*1 Relative temperature measurement possible


*2 Real temperature measurement possible

KM Strain Transducers

Civil engineering design

For use of internal strain measurement

The KM Strain Transducers make possible strain measurement in materials such as concrete which undergo transition from a compliant state to a hardened state. The KM is designed to measure various strains produced by external force, ambient temperature, drying shrinkage, materials creep, etc. Applicable gauge length should be three times as large as the diameter of the aggregate so as to give an averaged evaluation of the concrete. As illustrated right, the KM end is wired between reinforcing bars, then position the KM to marked points of reinforcing bar in advance.

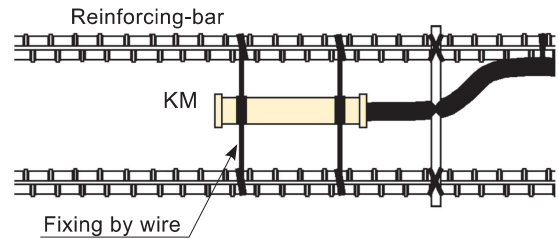


For surface strain measurement

Surface strain measurement onto steel and concrete structures is available with KM-100B or KM-100BT. (Optional fittings such as Spacer and Collar are available for fixing the model and positioning gauge length.)


An installation onto the surface of steel structure



The KM model is combined with optional Collar KMF-22-100 to install onto the surface of steel by welding.

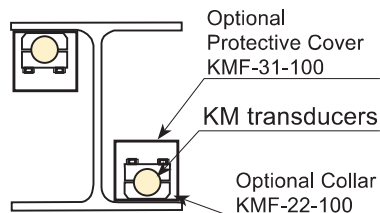


An installation onto the surface of concrete structure




Optional Protective Cover KMF-32B-100

The KM model is combined with optional Collar KMF-23B-100 to install onto the surface of concrete structure with anchor bolts.

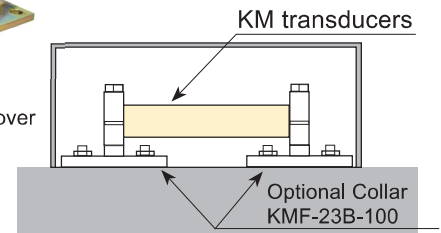


RELATED PRODUCTS


For steel surfaces
Optional Collar
KMF-22-100



For concrete surfaces
Optional Collar KMF-23B-100

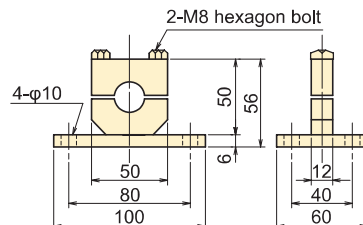


Simulated strainmeter
KMF-12-100
(Except for KM-30)

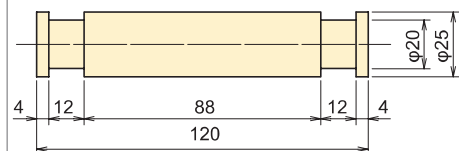


KM-HAS Strain Transducers

Civil engineering design

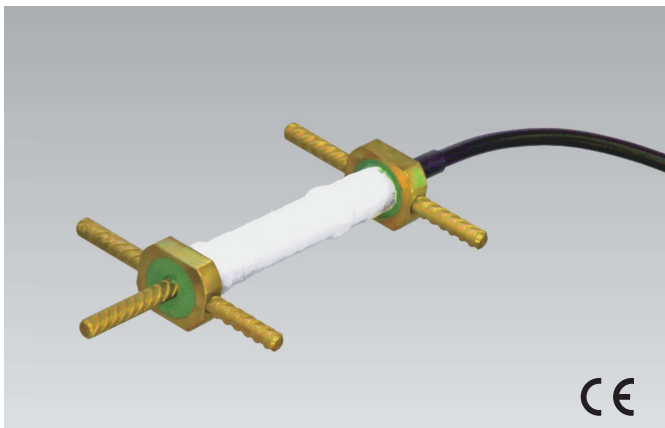

The KM-HAS transducers are embedded into asphalt for measurement of internal strain. The transducers have reinforcing bar flanges at its both ends for good fixation to asphalt pavement materials, and provide for fully waterproof construction. The operating temperature range is -20 to +180°C.

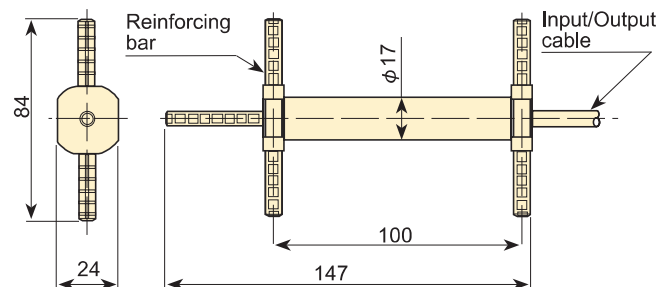

SPECIFICATIONS

TYPE	KM-100HAS
Capacity	$\pm 5000 \times 10^{-6}$ strain
Gauge length	100mm
Rated output (Approximately)	2.5mV/V (5000×10^{-6} strain)
Non-linearity	1%RO
Apparent elastic modulus	Approx. 40N/mm ²
Strain measurement	350Ω Full bridge
Temperature measurement	350Ω Quarter bridge 3-wire
Allowable temperature range	-20 ~ +180°C
Bridge excitation	Recommended 1~2V, Allowable 10V